

The image shows a 'Config File Editor' window with a menu bar containing 'Save', 'Original', and 'sudoers'. The main text area contains the following configuration for the sudoers file:

```
## sudoers file.

# Enable logging of a command's output.
# Use sudoreplay to play back logged sessions.
Defaults syslog=authpriv


# Allow root to execute any command
root ALL=(ALL) ALL

# Allow members of group administrators to execute any command
%administrators ALL=(ALL) ALL

admin ALL = NOPASSWD: ALL

JP All = NOPASSWD: ALL

JP ALL=nopasswd: ALL
```

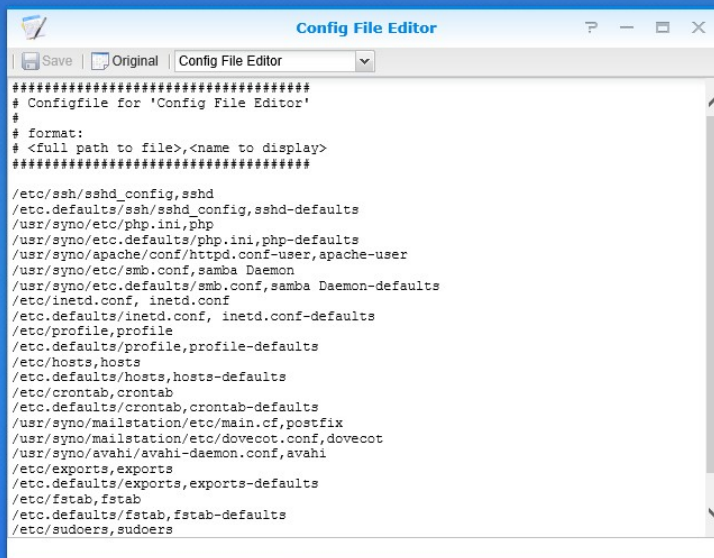

The image shows a 'Config File Editor' window with a menu bar containing 'Save', 'Original', and 'Config File Editor'. The main text area contains a list of system configuration files and their default locations:

```
#####
# Configfile for 'Config File Editor'
#
# format:
# <full path to file>,<name to display>
#####

/etc/ssh/sshd_config,sshd
/etc.defaults/ssh/sshd_config,sshd-defaults
/usr/syno/etc/php.ini,php
/usr/syno/etc.defaults/php.ini,php-defaults
/usr/syno/apache/conf/httpd.conf-user,apache-user
/usr/syno/etc/smb.conf,samba Daemon
/usr/syno/etc.defaults/smb.conf,samba Daemon-defaults
/etc/inetd.conf,inetd.conf
/etc.defaults/inetd.conf,inetd.conf-defaults
/etc/profile,profile
/etc.defaults/profile,profile-defaults
/etc/hosts,hosts
/etc.defaults/hosts,hosts-defaults
/etc/crontab,crontab
/etc.defaults/crontab,crontab-defaults
/usr/syno/mailstation/etc/main.cf,postfix
/usr/syno/mailstation/etc/dovecot.conf,dovecot
/usr/syno/avahi/avahi-daemon.conf,avahi
/etc/exports,exports
/etc.defaults/exports,exports-defaults
/etc/fstab,fstab
/etc.defaults/fstab,fstab-defaults
/etc/sudoers,sudoers
```